



THORNTHWAITE TECHNOLOGIES
THE SHOWER & WASHROOM SPECIALISTS

Data Sheet

Rada Vandal Resistant Showerheads

rada

www.thornthwaite.com.au

Rada Vandal Resistant Showerheads

Rada Vandal Resistant Showerheads are WELS - registered and offer a flow rate of up to 8.5 litres per minute - an easy way to substantially reduce water consumption and provide a great shower.

Connection

All showerheads - 1/2" BSP connection

Materials

Shower head: Brass, polished chrome finish.

Spray Cartridge: Engineering plastic.

Flow regulator: Engineering plastic.

All screws in contact with water are stainless steel.

Temperature

Designed to accept water supplied between 5°C and 65°C

Pressure Range


Recommended minimum dynamic inlet pressure: 10 kPa. (with flow regulator removed)

Maximum dynamic inlet pressure: 500 kPa (fitted with flow regulator).

Spray Performance

Minimum flow rate necessary to achieve a fully formed spray pattern: 4.5 L/min.

Approvals




Spray Patterns at 9 L/min


Recommended minimum height at 2 metres

Alternative spray positions — —

Rada VR2:

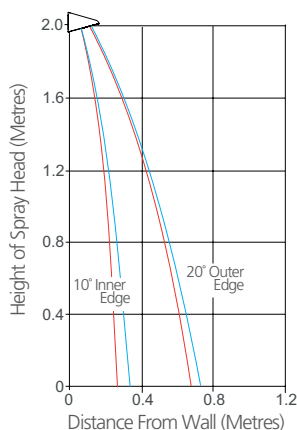

Rada VR105:

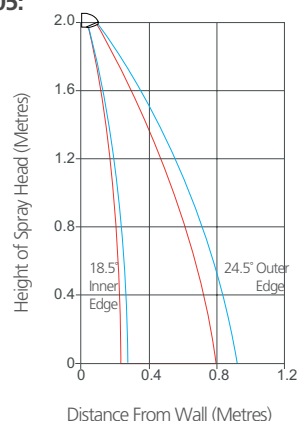


Commissioning & Maintenance


Refer to the Product Manual for detailed instructions. For further information on replacement parts and service contact Thornthwaite on 1300 137 170.

Description	Part No
Rada VR105 Vandal Resistant Showerhead – 8.5 L/min	09877
Rada VR106 Vandal Resistant Showerhead – 5.5 L/min	09885
Rada VR2 Vandal Resistant showerhead – 8 L/min	1652.009
ACCESSORY	
Rada VR105/VR106 300R adjustable spray plate cartridge	09887

Rada VR2 Showerhead

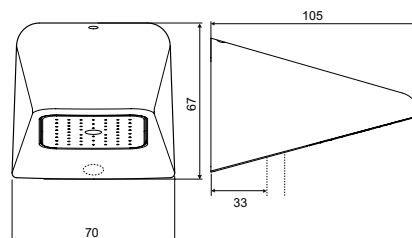

Rada VR105/106 Showerhead

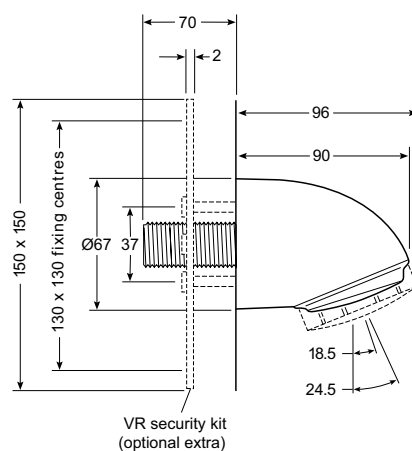

Warranty

2 years

Subject to manufacturer's conditions

More Information

Download product manuals, data sheets, specification sheets, line drawings and brochures from our website.

www.thornthwaite.com.au