



Rada Outlook **Installer Information**

- Digital thermostatic mixing valve sensor system
- For up to 6 outlets showers or basins
- Programmable fixed warm water temperatures
- WaterMark licenced to AS 4032.1 (TMV Standard)
- Rada Outlook is a TMV Do not install additional TMVs that supply water to or from Rada Outlook





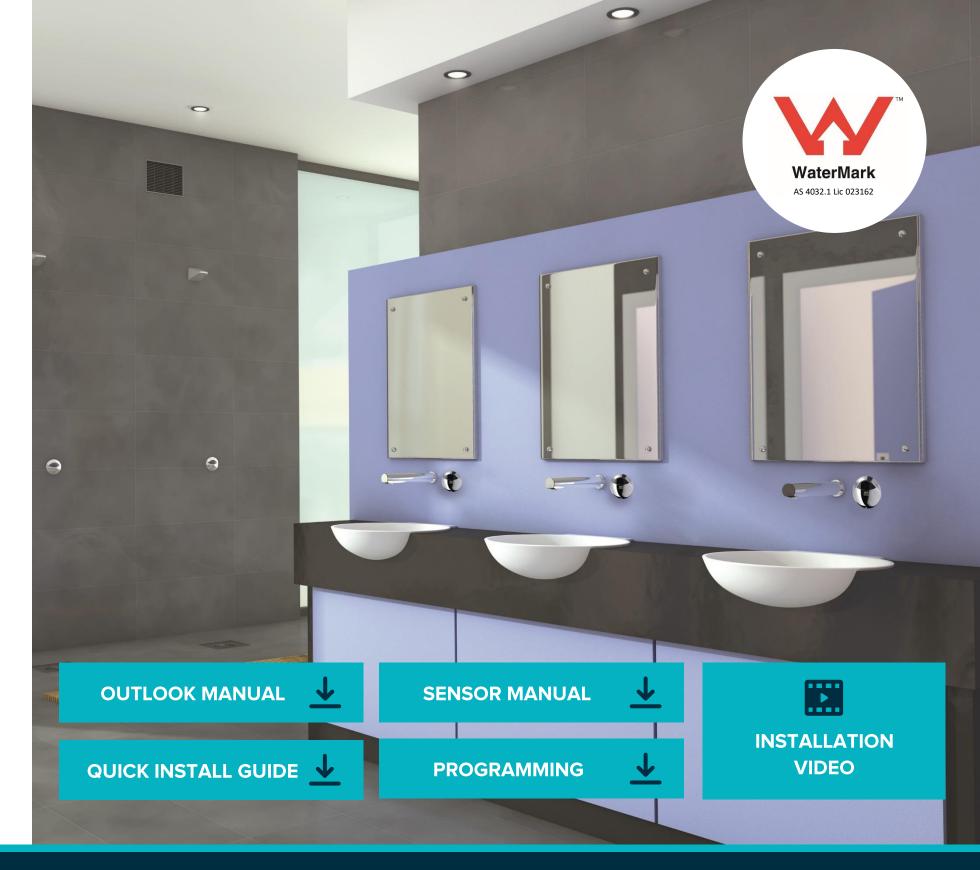

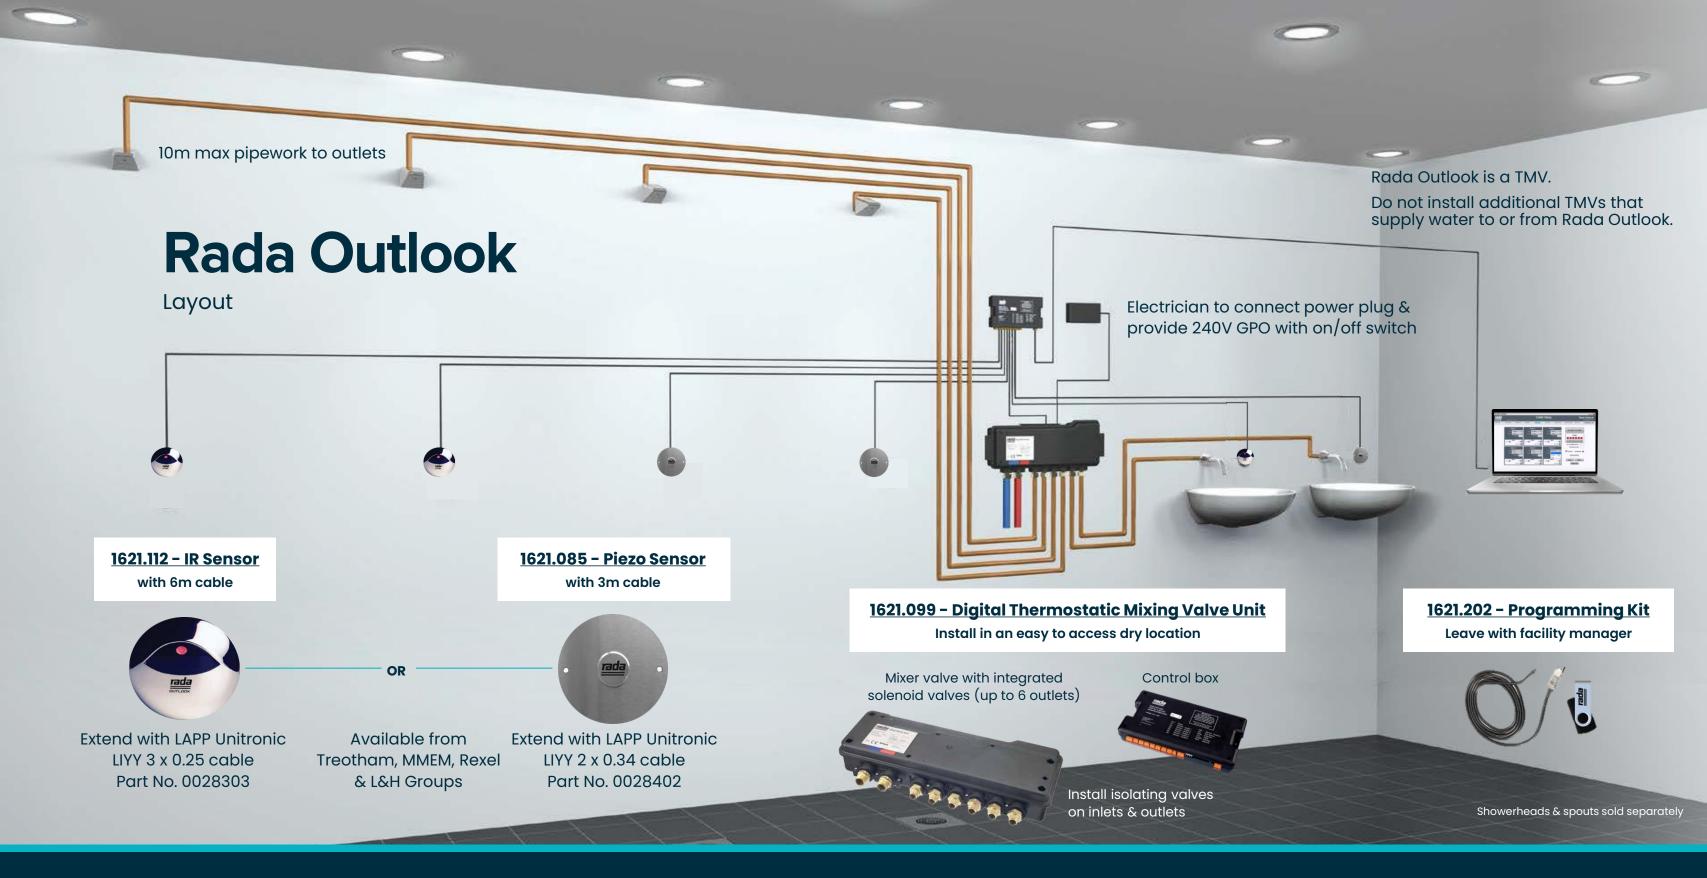






Unused Outlets on Mixer Valve

To prevent any risk of water being released from an unused outlet, one of the following MUST be done for EACH unused outlet:

- a) Preferred method Connect each unused outlet pipe into an adjacent in-service outlet pipe. This allows duty flushing to be done (see diagram).
- b) Cap off all unused outlets (caps not supplied).

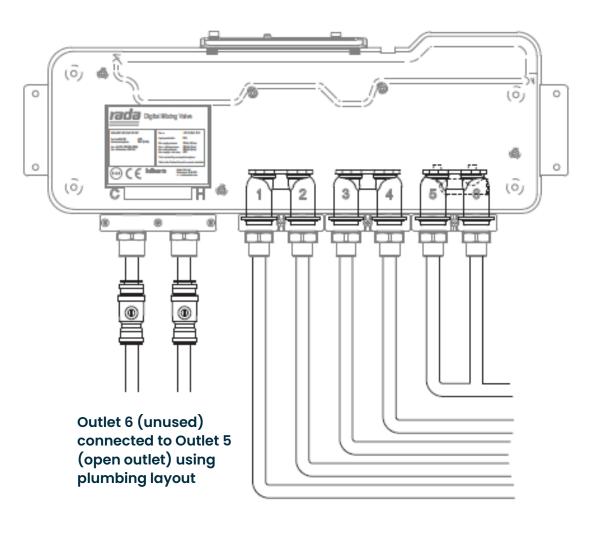


Do not install additional TMVs in the pipework that supplies water to or from Rada Outlook

Multiple Control Boxes?

When there are multiple Rada Outlook units:

a) Connect each Control Box with Cat 5 cable

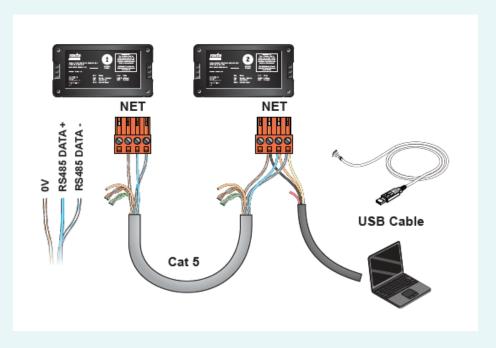

b) Set the address as per the Outlook Manual (page 25-26) and Installation Video





